


100K SoftSun™ Linear Daylight Source

Technical Specifications


Head

Wattage: 100,000
 Lamp Type: ESL™ (Enhanced Spectrum Long Arc)
 Lamp Mount: Shock Isolated
 Color Temp: 5400 K
 CRI: 96
 Dimensions: 118" w 49" h 22" d
 Weight: 320-lbs.
 Shipping Weight: 800-lbs
 Mounting: 3 Junior Pins

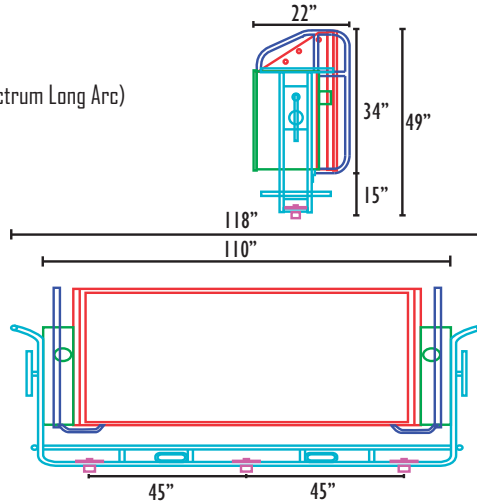

Power Supply

Input Power 50/60Hz: 380/480V AC Three Phase
 Power Consumption: 265 amps
 Dimensions: 27" w 42" h 33" d
 Weight: 440-lbs.
 Shipping Weight: 500-lbs.

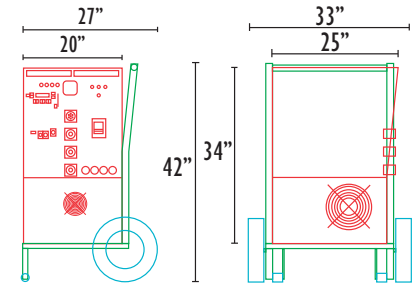

Photometrics

ftc	spot	8,330	2,400	1,111	630	278	151	24	6
	flood	3,830	1,147	526	297	131	62	12	3
feet		25	50	75	100	150	200	500	1,000
	meters	7.6	15.2	22.9	30.5	45.7	61	152.4	304.8
lux	spot	89,663	25,833	11,959	6,781	2,992	1,625	258	64
	flood	41,226	12,346	5,662	3,197	1,410	667	129	3

Beam Spread

